

CIRCUIT-BREAKER SZ S00, FOR MOTOR PROTECTION, CLASS 10, A-RELEASE 4.5...6.3A, N-RELEASE 82A SPRING-L. CONNECTION, STANDARD SW. CAPACITY



|                                                                           |                      |
|---------------------------------------------------------------------------|----------------------|
| product brand name                                                        | SIRIUS               |
| Product designation                                                       | 3RV2 circuit breaker |
| General technical data:                                                   |                      |
| Size of the circuit-breaker                                               | S00                  |
| Size of contactor can be combined company-specific                        | S2                   |
| Product expansion                                                         |                      |
| • Auxiliary switch                                                        | Yes                  |
| Power loss [W] total typical                                              | 6 W                  |
| Insulation voltage with degree of pollution 3 rated value                 | 690 V                |
| Surge voltage resistance rated value                                      | 6 kV                 |
| maximum permissible voltage for safe isolation                            |                      |
| • in networks with grounded star point between main and auxiliary circuit | 400 V                |
| • in networks with grounded star point between main and auxiliary circuit | 400 V                |
| Protection class IP                                                       |                      |
| • on the front                                                            | IP20                 |
| • of the terminal                                                         | IP20                 |

|                                                    |                  |
|----------------------------------------------------|------------------|
| <b>Shock resistance</b>                            |                  |
| • acc. to IEC 60068-2-27                           | 25g / 11 ms      |
| <b>Mechanical service life (switching cycles)</b>  |                  |
| • of the main contacts typical                     | 100 000          |
| • of auxiliary contacts typical                    | 100 000          |
| <b>Electrical endurance (switching cycles)</b>     |                  |
| • typical                                          | 100 000          |
| <b>Type of protection</b>                          | Increased safety |
| <b>Certificate of suitability relating to ATEX</b> | on request       |
| <b>Protection against electrical shock</b>         | finger-safe      |
| Equipment marking acc. to DIN EN 81346-2           | Q                |

#### Ambient conditions:

|                                                                |                |
|----------------------------------------------------------------|----------------|
| <b>Installation altitude at height above sea level maximum</b> | 2 000 m        |
| <b>Ambient temperature</b>                                     |                |
| • during operation                                             | -20 ... +60 °C |
| • during storage                                               | -50 ... +80 °C |
| • during transport                                             | -50 ... +80 °C |
| <b>Temperature compensation</b>                                | -20 ... +60 °C |
| <b>Relative humidity during operation</b>                      | 10 ... 95 %    |

#### Main circuit:

|                                                                                   |               |
|-----------------------------------------------------------------------------------|---------------|
| <b>Number of poles for main current circuit</b>                                   | 3             |
| <b>Adjustable pick-up value current of the current-dependent overload release</b> | 4.5 ... 6.3 A |
| <b>Operating voltage</b>                                                          |               |
| • rated value                                                                     | 690 V         |
| • at AC-3 rated value maximum                                                     | 690 V         |
| <b>Operating frequency rated value</b>                                            | 50 ... 60 Hz  |
| <b>Operating current rated value</b>                                              | 6.3 A         |
| <b>Operating current</b>                                                          |               |
| • at AC-3                                                                         |               |
| — at 400 V rated value                                                            | 6.3 A         |
| <b>Operating power</b>                                                            |               |
| • at AC-3                                                                         |               |
| — at 230 V rated value                                                            | 1 500 W       |
| — at 400 V rated value                                                            | 2 200 W       |
| — at 500 V rated value                                                            | 3 000 W       |
| — at 690 V rated value                                                            | 4 000 W       |
| <b>Operating frequency</b>                                                        |               |
| • at AC-3 maximum                                                                 | 15 1/h        |

#### Auxiliary circuit:

|                              |   |
|------------------------------|---|
| <b>Number of NC contacts</b> |   |
| • for auxiliary contacts     | 0 |
| <b>Number of NO contacts</b> |   |
| • for auxiliary contacts     | 0 |
| <b>Number of CO contacts</b> |   |
| • for auxiliary contacts     | 0 |

#### Protective and monitoring functions:

|                                                                          |          |
|--------------------------------------------------------------------------|----------|
| <b>Trip class</b>                                                        | CLASS 10 |
| <b>Design of the overload release</b>                                    | thermal  |
| <b>Operational short-circuit current breaking capacity (Ics) at AC</b>   |          |
| • at 240 V rated value                                                   | 100 kA   |
| • at 400 V rated value                                                   | 100 kA   |
| • at 500 V rated value                                                   | 100 kA   |
| • at 690 V rated value                                                   | 4 kA     |
| <b>Maximum short-circuit current breaking capacity (Icu)</b>             |          |
| • at AC at 240 V rated value                                             | 100 kA   |
| • at AC at 400 V rated value                                             | 100 kA   |
| • at AC at 500 V rated value                                             | 100 kA   |
| • at AC at 690 V rated value                                             | 6 kA     |
| <b>Breaking capacity short-circuit current (Icn)</b>                     |          |
| • at 1 current path at DC at 150 V rated value                           | 10 kA    |
| • with 2 current paths in series at DC at 300 V rated value              | 10 kA    |
| • with 3 current paths in series at DC at 450 V rated value              | 10 kA    |
| <b>Response value current of the instantaneous short-circuit release</b> | 82 A     |

#### UL/CSA ratings:

|                                                                 |         |
|-----------------------------------------------------------------|---------|
| <b>Full-load current (FLA) for three-phase AC motor</b>         |         |
| • at 480 V rated value                                          | 6.3 A   |
| • at 600 V rated value                                          | 6.3 A   |
| • yielded mechanical performance [hp] for single-phase AC motor |         |
| — at 110/120 V rated value                                      | 0.25 hp |
| — at 230 V rated value                                          | 0.5 hp  |
| • Yielded mechanical performance [hp] for three-phase AC motor  |         |
| — at 200/208 V rated value                                      | 1 hp    |
| — at 220/230 V rated value                                      | 1.5 hp  |
| — at 460/480 V rated value                                      | 3 hp    |
| — at 575/600 V rated value                                      | 5 hp    |

| Short-circuit protection                                                                       |                                                                                        |
|------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|
| <b>Design of the short-circuit trip</b>                                                        | magnetic                                                                               |
| <b>Design of the fuse link for IT network for short-circuit protection of the main circuit</b> |                                                                                        |
| • at 400 V                                                                                     | gL/gG 50 A                                                                             |
| • at 500 V                                                                                     | gL/gG 40 A                                                                             |
| • at 690 V                                                                                     | gL/gG 35 A                                                                             |
| Installation/ mounting/ dimensions:                                                            |                                                                                        |
| <b>Mounting position</b>                                                                       | any                                                                                    |
| <b>Mounting type</b>                                                                           | screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 |
| <b>Height</b>                                                                                  | 106 mm                                                                                 |
| <b>Width</b>                                                                                   | 45 mm                                                                                  |
| <b>Depth</b>                                                                                   | 96 mm                                                                                  |
| <b>Required spacing</b>                                                                        |                                                                                        |
| • with side-by-side mounting                                                                   |                                                                                        |
| — forwards                                                                                     | 0 mm                                                                                   |
| — Backwards                                                                                    | 0 mm                                                                                   |
| — upwards                                                                                      | 50 mm                                                                                  |
| — downwards                                                                                    | 50 mm                                                                                  |
| — at the side                                                                                  | 0 mm                                                                                   |
| • for grounded parts                                                                           |                                                                                        |
| — forwards                                                                                     | 0 mm                                                                                   |
| — Backwards                                                                                    | 0 mm                                                                                   |
| — upwards                                                                                      | 50 mm                                                                                  |
| — at the side                                                                                  | 30 mm                                                                                  |
| — downwards                                                                                    | 50 mm                                                                                  |
| • for live parts                                                                               |                                                                                        |
| — forwards                                                                                     | 0 mm                                                                                   |
| — Backwards                                                                                    | 0 mm                                                                                   |
| — upwards                                                                                      | 50 mm                                                                                  |
| — downwards                                                                                    | 50 mm                                                                                  |
| — at the side                                                                                  | 30 mm                                                                                  |
| Connections/ Terminals:                                                                        |                                                                                        |
| <b>Product function</b>                                                                        |                                                                                        |
| • removable terminal for auxiliary and control circuit                                         | No                                                                                     |
| <b>Type of electrical connection</b>                                                           |                                                                                        |
| • for main current circuit                                                                     | spring-loaded terminals                                                                |
| <b>Arrangement of electrical connectors for main current circuit</b>                           | Top and bottom                                                                         |
| <b>Type of connectable conductor cross-sections</b>                                            |                                                                                        |

|                                                                                                                                                                                                                                                                                                                         |                                                                                                                                 |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• for main contacts           <ul style="list-style-type: none"> <li>— single or multi-stranded</li> <li>— finely stranded with core end processing</li> <li>— finely stranded without core end processing</li> </ul> </li> <li>• at AWG conductors for main contacts</li> </ul> | 2x (0,5 ... 4 mm <sup>2</sup> )<br>2x (0.5 ... 2.5 mm <sup>2</sup> )<br>2x (0.5 ... 2.5 mm <sup>2</sup> )<br><br>2x (20 ... 12) |
| <b>Design of screwdriver shaft</b>                                                                                                                                                                                                                                                                                      | Diameter 5 to 6 mm                                                                                                              |

| Safety related data:                                                                                                                                                                |              |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| <b>B10 value with high demand rate acc. to SN 31920</b>                                                                                                                             | 50 000       |
| <b>Proportion of dangerous failures</b> <ul style="list-style-type: none"> <li>• with low demand rate acc. to SN 31920</li> <li>• with high demand rate acc. to SN 31920</li> </ul> | 40 %<br>40 % |
| <b>Failure rate [FIT]</b> <ul style="list-style-type: none"> <li>• with low demand rate acc. to SN 31920</li> </ul>                                                                 | 50 FIT       |
| <b>T1 value for proof test interval or service life acc. to IEC 61508</b>                                                                                                           | 10 y         |
| <b>Display version</b> <ul style="list-style-type: none"> <li>• for switching status</li> </ul>                                                                                     | Handle       |

## Certificates/approvals

|                          |                                |
|--------------------------|--------------------------------|
| General Product Approval | For use in hazardous locations |
|--------------------------|--------------------------------|



[KTL](#)



|                                |                           |                   |                   |
|--------------------------------|---------------------------|-------------------|-------------------|
| For use in hazardous locations | Declaration of Conformity | Test Certificates | Shipping Approval |
|--------------------------------|---------------------------|-------------------|-------------------|



[Typprüfbescheinigung/Werkszeugnis](#)

[Werksbescheinigung](#)

[spezielle Prüfbescheinigungen](#)



|                   |
|-------------------|
| Shipping Approval |
|-------------------|



|                   |       |         |
|-------------------|-------|---------|
| Shipping Approval | other | Railway |
|-------------------|-------|---------|



[Bestätigungen](#)

[Umweltbestätigung](#)



[Schwingen/Schocke](#)

## Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV20111GA20>

Cax online generator




<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV20111GA20>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV20111GA20>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RV20111GA20&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV20111GA20&lang=en)

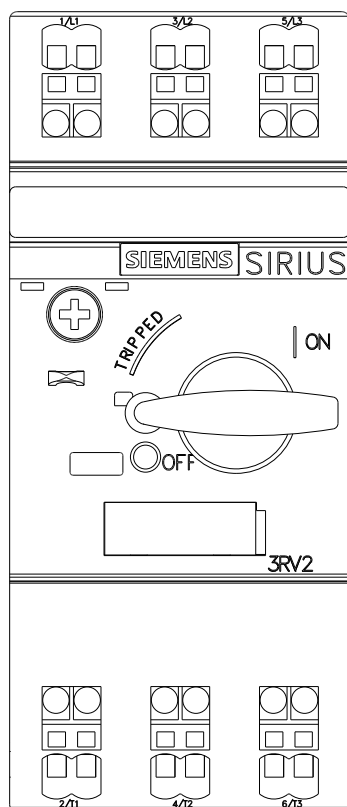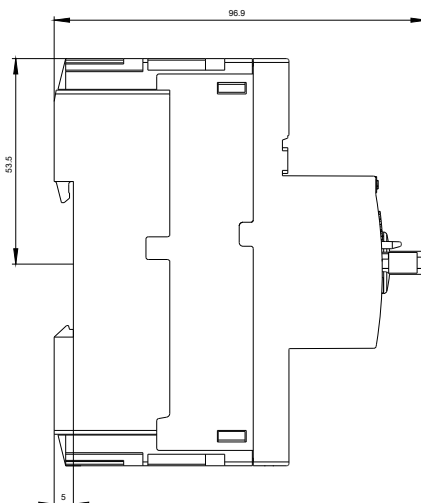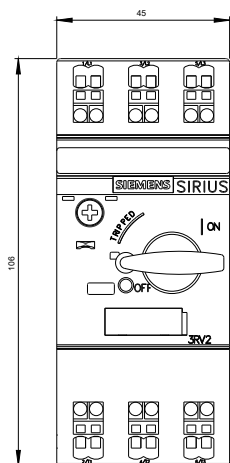

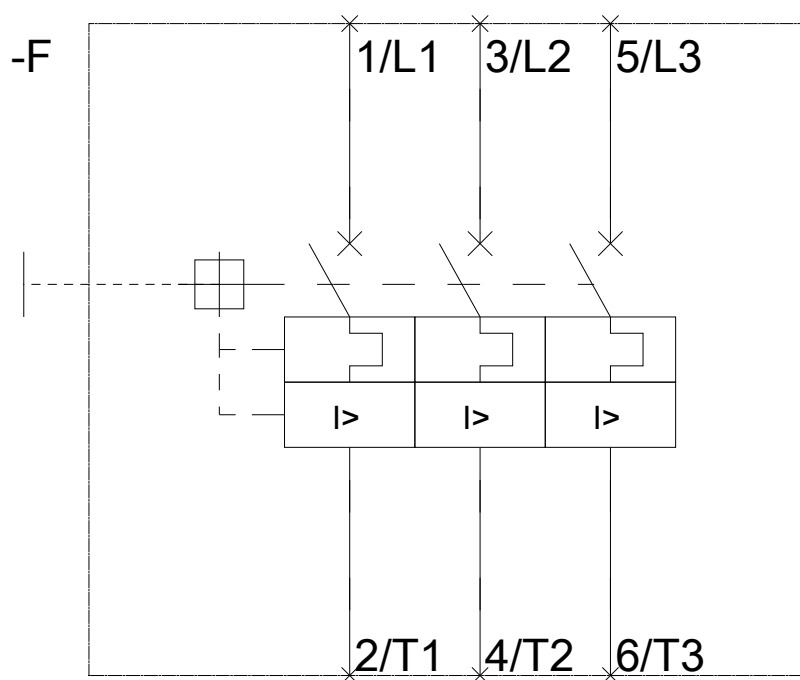

last modified:

24.02.2016