Bearing blocks, Series ICS

- Suitable piston Ø 32 40 50 63 80 100 mm



Technical data


Part No.	Piston Ø
2992112030	32 mm
2992112040	40 mm
2992112050	50 mm
2992112060	63 mm
2992112080	80 mm
2992112100	100 mm

Delivered in pairs, Max. continous temperature 85 °C . Peak temperature of 150 °C . Higher temperatures on request.

Technical information

Material	
Material	Stainless steel, acid-proof
Guide bushing	Plastic


Dimensions

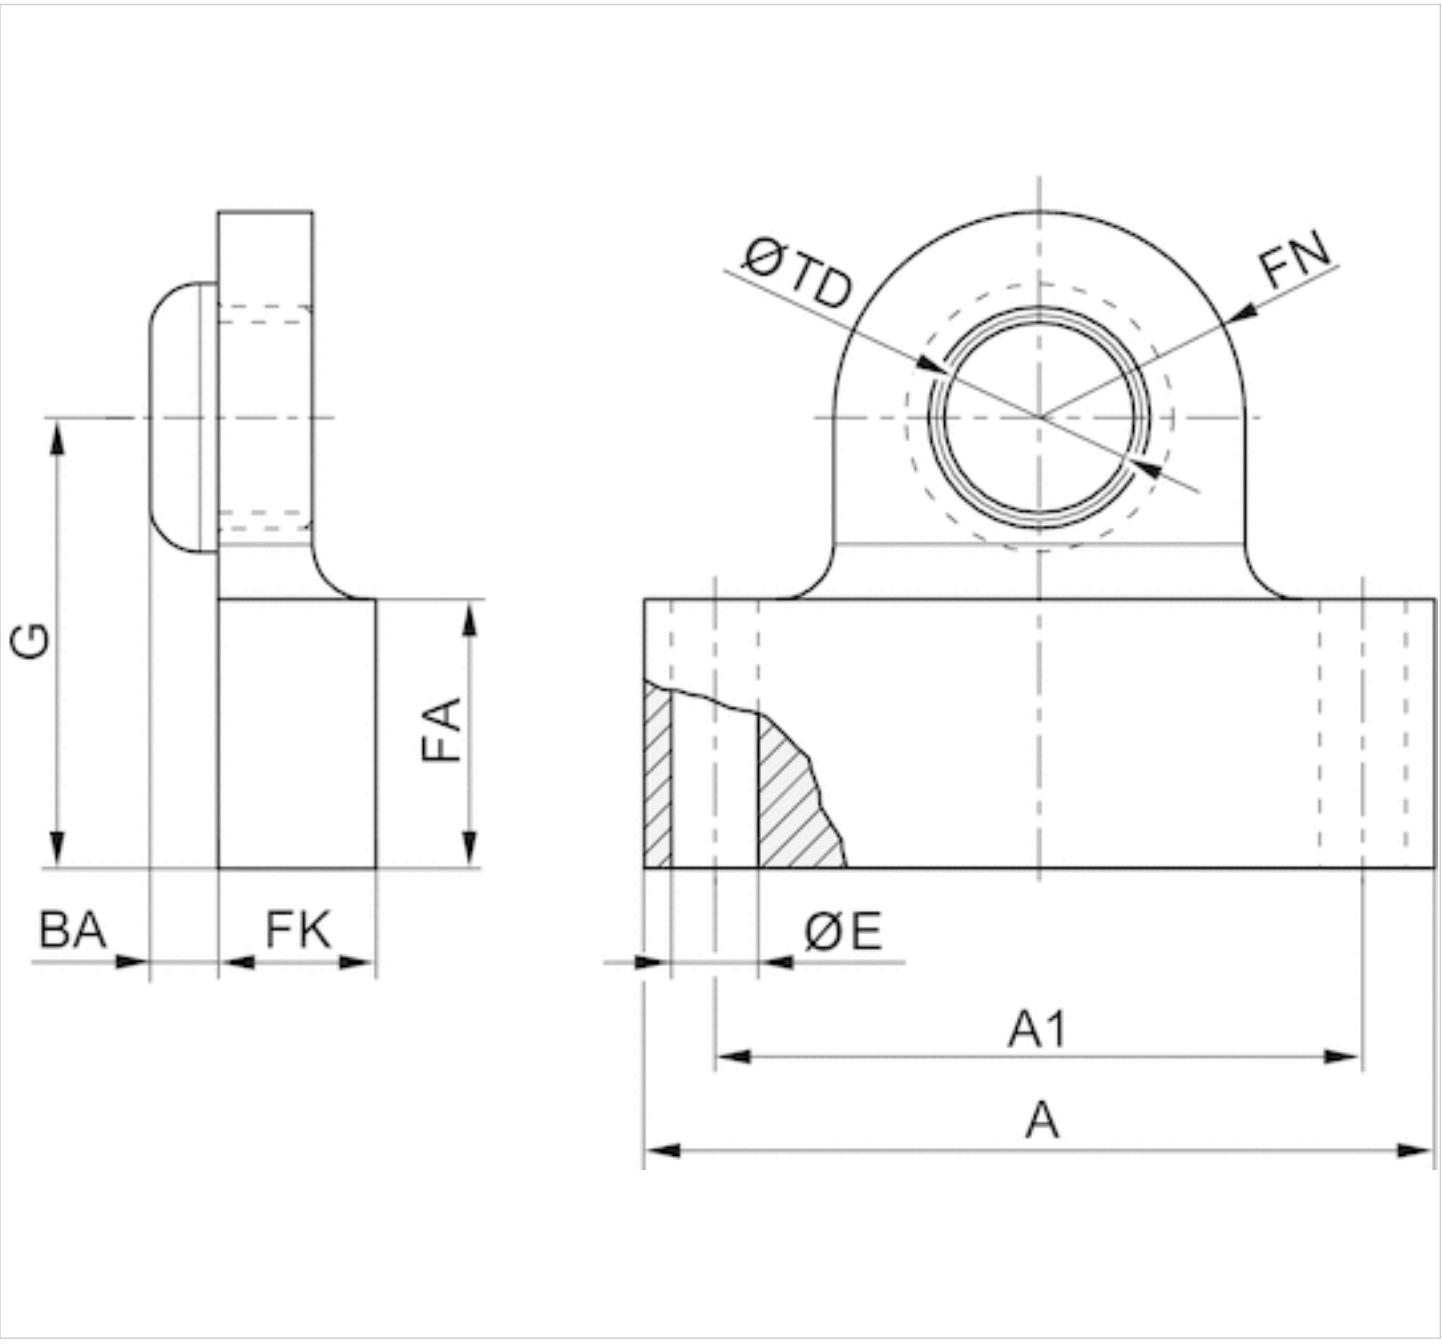

Dimensions

Part No.	Piston Ø	A	A1	BA	Ø E	FA	FK	FN	G	Ø TD h9
2992112030	32 mm	50	41	4.25	5.5	17	10	13	28.5	12
2992112040	40 mm	55	46	4.25	5.5	17	10	15.5	38	12
2992112050	50 mm	64	53	5.25	6.5	18.5	12	17.5	38	16
2992112060	63 mm	66	56	8.25	6.5	18.5	12	19	46.5	16
2992112080	80 mm	82	72	8.25	6.5	18.5	12	26	50.5	16
2992112100	100 mm	108	88	10.25	9	22	16	26	65	20

Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management

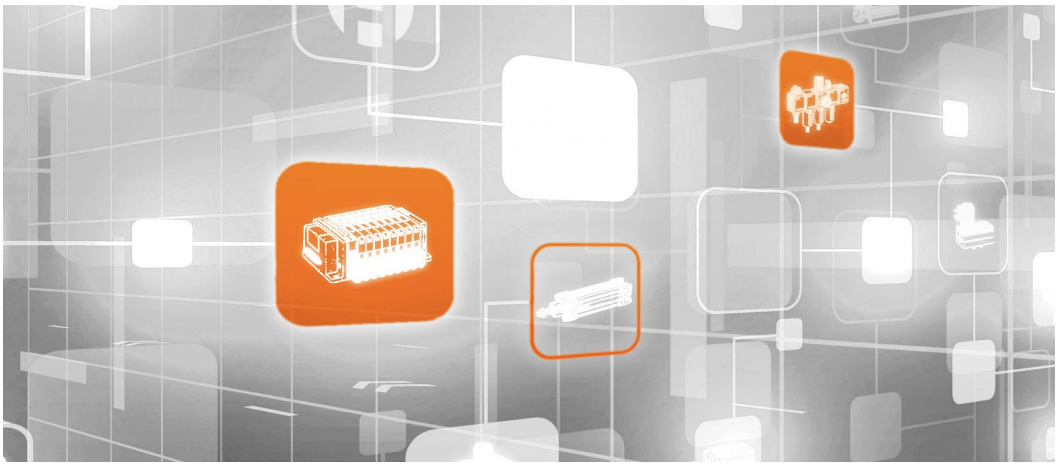

Visit us: Emerson.com/Aventics

Your local contact: Emerson.com/contactus

Emerson.com

Facebook.com/EmersonAutomationSolutions

LinkedIn.com/company/Emerson-Automation-Solutions

Twitter.com/EMR_Automation

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2020 Emerson Electric Co. All rights reserved.
2020-12

EMERSON.

CONSIDER IT SOLVED™