
Safety **rope switch without reset** for simple stop

Selection diagram




FP 874-M2 | FD 874-M2 | FL 874-M2 | FR 874-M2 | FM 874-M2 | FX 874-M2 | FZ 874-M2

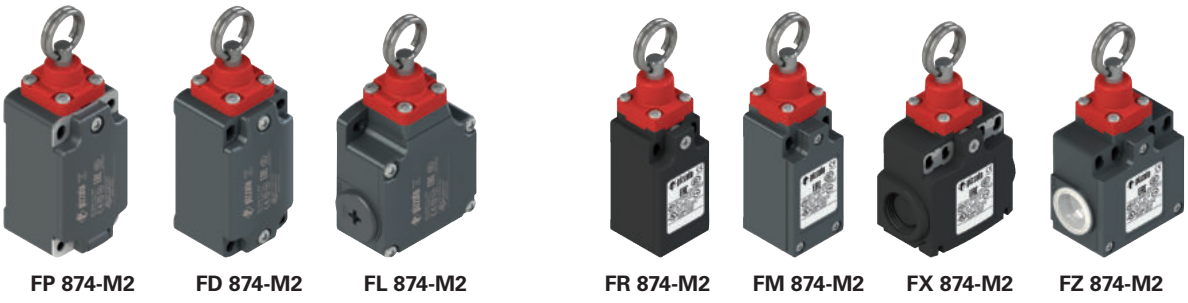


79

ACTUATORS




79 | 80

ACTUATORS

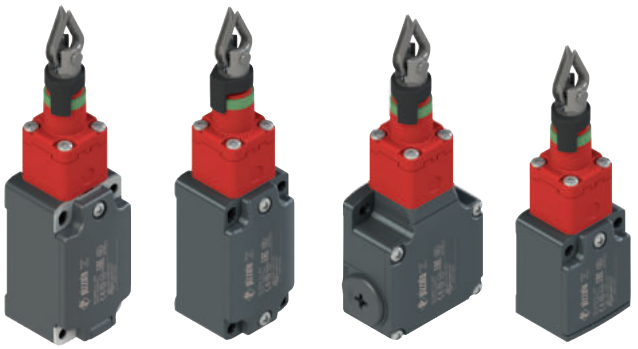


FP | FD | FL | FC

CONTACT BLOCKS

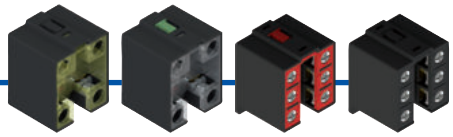

9	18	20	21
2NC slow action	1NO+1NC slow action	1NO+2NC slow action	3NC slow action



22	33	34
2NO+1NC slow action	1NO+1NC slow action	2NC slow action


CONDUIT ENTRIES



Threaded conduit entry (standard) | With cable gland | With M12 plastic connector | With M12 metal connector

product options

Safety **rope switch without reset** for simple stop

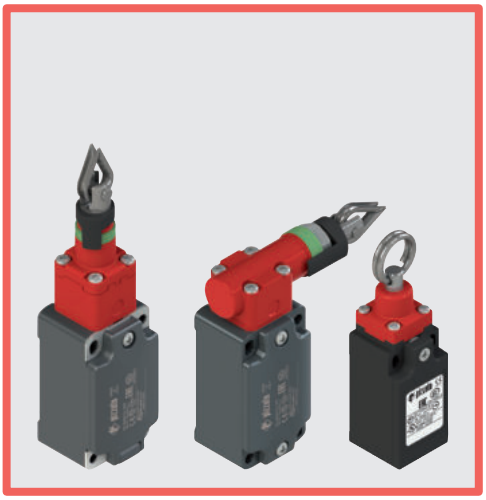

Main features
- Metal or plastic housing, from one to three conduit entries
- Protection degree IP67
- 7 contact blocks available
- Versions with vertical or horizontal actuation
- Versions with assembled M12 connector
- Versions with gold-plated silver contacts

Quality marks:

IMQ approval:	EG605 (FD-FL-FP-FC series) EG610 (FR-FX-FM-FZ series)
UL approval:	E131787
CCC approval:	2007010305230000 (FD-FP-FL-FC series) 2007010305230013 (FR-FX-FM-FZ series)
EAC approval:	RU C-IT.УТ03.B.00035/19

Technical data

Housing

FP, FR, FX series housing made of glass fibre reinforced technopolymer, self-extinguishing, shock-proof and with double insulation: ⧈
FD, FL, FC, FM, FZ series: metal housing, baked powder coating.

FD, FP, FC, FR, FM series: one threaded conduit entry:	M20x1.5 (standard)
FX series: two knock-out threaded conduit entries:	M20x1.5 (standard)
FZ series: two threaded conduit entries:	M20x1.5 (standard)
FL series: three threaded conduit entries:	M20x1.5 (standard)
Protection degree:	IP67 acc. to EN 60529 with cable gland of equal or higher protection degree

General data

SIL (SIL CL) up to:	SIL 3 acc. to EN 62061
Performance Level (PL) up to:	PL e acc. to EN ISO 13849-1
Safety parameters:	
B_{10D}:	2,000,000 for NC contacts
Mission time:	20 years
Ambient temperature:	-25°C … +80°C (standard) -40°C … +80°C (T6 option)
Max. actuation frequency:	1 cycle / 6 s
Mechanical endurance:	1 million operating cycles
Max. actuation speed:	0.5 m/s
Min. actuation speed:	1 mm/s
Tightening torques for installation:	see pages 339 and 341
Wire cross-sections and wire stripping lengths:	see page 357

In compliance with standards:
IEC 60947-5-1, IEC 60947-1, IEC 60204-1, EN ISO 14119, EN ISO 12100, IEC 60529, EN 50581, UL 508, CSA 22.2 No.14 .
Approvals:
EN 60947-5-1, UL 508, CSA 22.2 No.14, GB/T14048.5-2017.




Compliance with the requirements of:
Low Voltage Directive 2014/35/EU, EMC Directive 2014/30/EU, RoHS Directive 2011/65/EU.
Positive contact opening in conformity with standards:
IEC 60947-5-1, EN 60947-5-1.

⚠ **If not expressly indicated in this chapter, for correct installation and utilization of all articles see the instructions given on pages 337 to 350.**





Electrical data			Utilization category
without connector	Thermal current (I_{th}):	10 A	Alternating current: AC15 (50÷60 Hz)
	Rated insulation voltage (U_i):	500 Vac 600 Vdc 400 Vac 500 Vdc (contact blocks 20, 21, 22, 33, 34)	U_e (V) 250 400 500 I_e (A) 6 4 1
	Rated impulse withstand voltage (U_{imp}):	6 kV 4 kV (contact blocks 20, 21, 22, 33, 34)	Direct current: DC13
	Conditional short circuit current:	1000 A acc. to EN 60947-5-1	U_e (V) 24 125 250 I_e (A) 3 0.55 0.3
	Protection against short circuits:	type aM fuse 10 A 500 V	
	Pollution degree:	3	
with M12 connector, 4 and 5-pole	Thermal current (I_{th}):	4 A	Alternating current: AC15 (50÷60 Hz)
	Rated insulation voltage (U_i):	250 Vac 300 Vdc	U_e (V) 24 120 250 I_e (A) 4 4 4
	Protection against short circuits:	type gG fuse 4 A 500 V	Direct current: DC13
	Pollution degree:	3	U_e (V) 24 125 250 I_e (A) 3 0.55 0.3
with M12 connector, 8-pole	Thermal current (I_{th}):	2 A	Alternating current: AC15 (50÷60 Hz)
	Rated insulation voltage (U_i):	30 Vac 36 Vdc	U_e (V) 24 I_e (A) 2
	Protection against short circuits:	type gG fuse 2 A 500 V	Direct current: DC13
	Pollution degree:	3	U_e (V) 24 I_e (A) 2

Safety **rope switch without reset** for simple stop




Contact type:
L = slow action

Contact blocks		Technopolymer housing		Metal housing		Metal housing	
							
9	L	FP 979-M2	2NC	FD 979-M2	2NC	FD 980-M2	2NC
18	L	FP 1879-M2	1NO+1NC	FD 1879-M2	1NO+1NC	FD 1880-M2	1NO+1NC
20	L	FP 2079-M2	1NO+2NC	FD 2079-M2	1NO+2NC	FD 2080-M2	1NO+2NC
21	L	FP 2179-M2	3NC	FD 2179-M2	3NC	FD 2180-M2	3NC
22	L	FP 2279-M2	2NO+1NC	FD 2279-M2	2NO+1NC	FD 2280-M2	2NO+1NC
33	L	FP 3379-M2	1NO+1NC	FD 3379-M2	1NO+1NC	FD 3480-M2	1NO+1NC
34	L	FP 3479-M2	2NC	FD 3479-M2	2NC	FD 3480-M2	2NC
Actuating force		Initial 63 N…final 83 N (90 N)		Initial 63 N…final 83 N (90 N)		Initial 147 N…final 235 N (250 N)	
Travel diagrams		Page 204 - group 1		Page 204 - group 1		Page 204 - group 2	

Contact type:
L = slow action

Contact blocks		Metal housing		Metal housing		Metal housing		Metal housing	
									
9	L	FL 979-M2	2NC	FL 980-M2	2NC	/		/	
18	L	FL 1879-M2	1NO+1NC	FL 1880-M2	1NO+1NC	/		/	
20	L	FL 2079-M2	1NO+2NC	FL 2080-M2	1NO+2NC	/		/	
21	L	FL 2179-M2	3NC	FL 2180-M2	3NC	/		/	
22	L	FL 2279-M2	2NO+1NC	FL 2280-M2	2NO+1NC	/		/	
33	L	FL 3379-M2	1NO+1NC	FL 3380-M2	1NO+1NC	FC 3379-M2	1NO+1NC	FC 3380-M2	1NO+1NC
34	L	FL 3479-M2	2NC	FL 3480-M2	2NC	FC 3479-M2	2NC	FC 3480-M2	2NC
Actuating force		Initial 63 N…final 83 N (90 N)		Initial 147 N…final 235 N (250 N)		Initial 63 N…final 83 N (90 N)		Initial 147 N…final 235 N (250 N)	
Travel diagrams		Page 204 - group 1		Page 204 - group 2		Page 204 - group 1		Page 204 - group 2	

Contact type:
L = slow action

Contact blocks		Technopolymer housing		Metal housing		Metal housing	
							
8	L	FP 874-M2	1NC	FD 874-M2	1NC	FL 874-M2	1NC
Actuating force		Initial 63 N…final 83 N (90 N)		Initial 63 N…final 83 N (90 N)		Initial 63 N…final 83 N (90 N)	
Travel diagrams		Page 204 - group 3		Page 204 - group 3		Page 204 - group 3	

All values in the drawings are in mm


Accessories See page 321

→ The 2D and 3D files are available at **www.pizzato.com**


Safety **rope switch without reset** for simple stop

Application examples and max. rope length for switches with longitudinal head


Example A

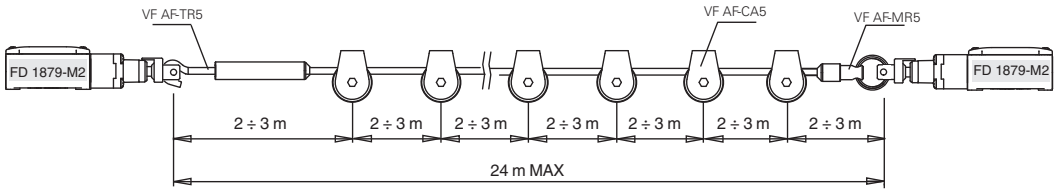


Example B

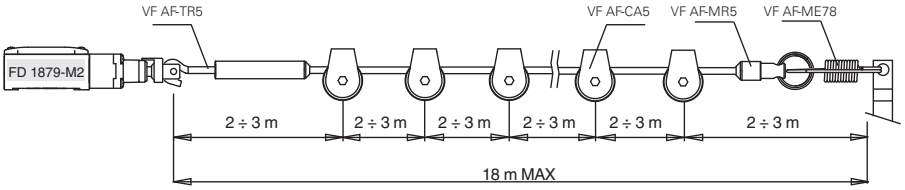


Example C

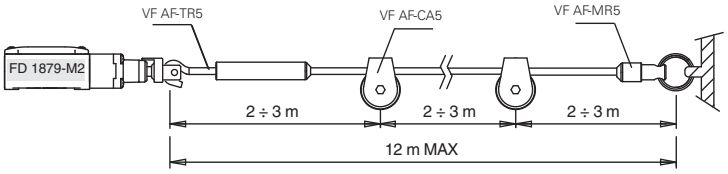

Example D

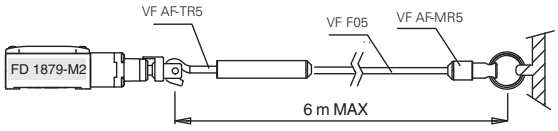


Example E

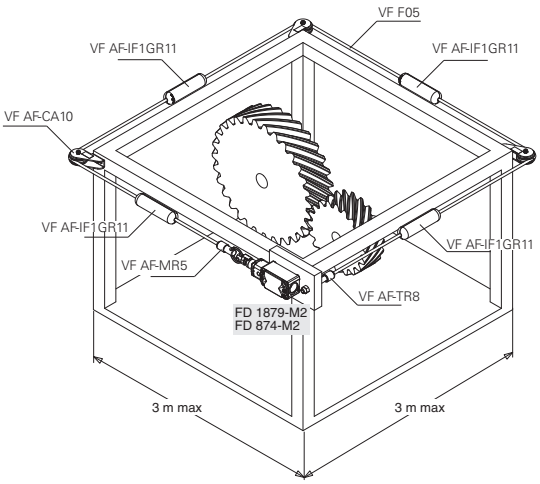


Application examples and max. rope length for switches with transversal head


Example F

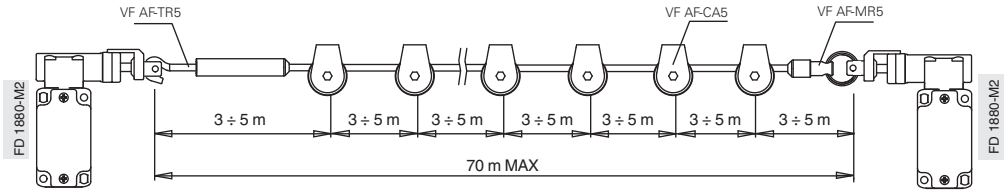


Example G

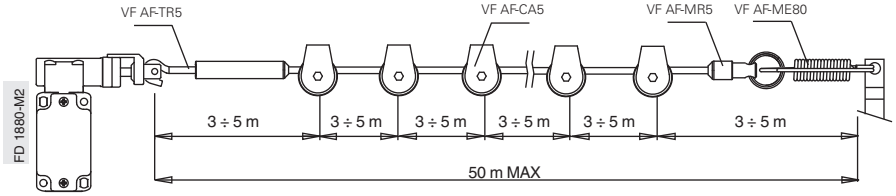

Example H

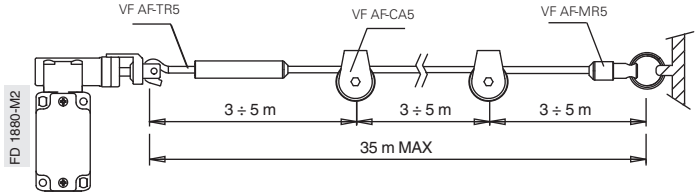

Example I

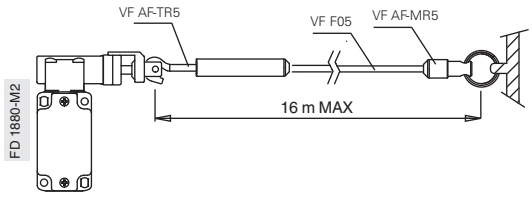

Example J

